


- HYDRANT TO BE:
  - WATEROUS CLASSIC PACER.
  - MUELLER CENTURION MODEL A-403
  - MUELLER SUPER CENTURION 250 MODEL A-423.
  - OR APPROVED EQUAL.
- EQUIP WITH THREE HOSE NOZZLES/CONNECTIONS AS FOLLOWS:
  - ONE – FACTORY INSTALLED 5 INCH STORZ PUMPER NOZZLE/CONNECTOR, INCLUDING A MANUFACTURER SUPPLIED AND INSTALLED ANODIZED ALUMINUM NOZZLE CAP WITH A 1.5 INCH PENTAGON NUT AND NO ROCKER LUG.
  - TWO – 2.5 INCH HOSE NOZZLES/CONNECTIONS (WITH NATIONAL STANDARD THREADS) AND STANDARD NOZZLE CAPS WITH 1.5 INCH PENTAGON NUTS, AND NO ROCKER LUGS.
- USE SS NUTS AND BOLTS AS APPROVED BY THE ENGINEER.
- ALL EXPOSED WATERMAIN SHALL BE WRAPPED WITH POLYETHYLENE IN ACCORDANCE WITH AWWA C-105.
- BARREL TO BE BRIGHT RED.
- ALL VALVES TO OPEN COUNTER-CLOCKWISE.
- SEE TYPICAL VALVE INSTALLATION DETAIL FOR VALVE.

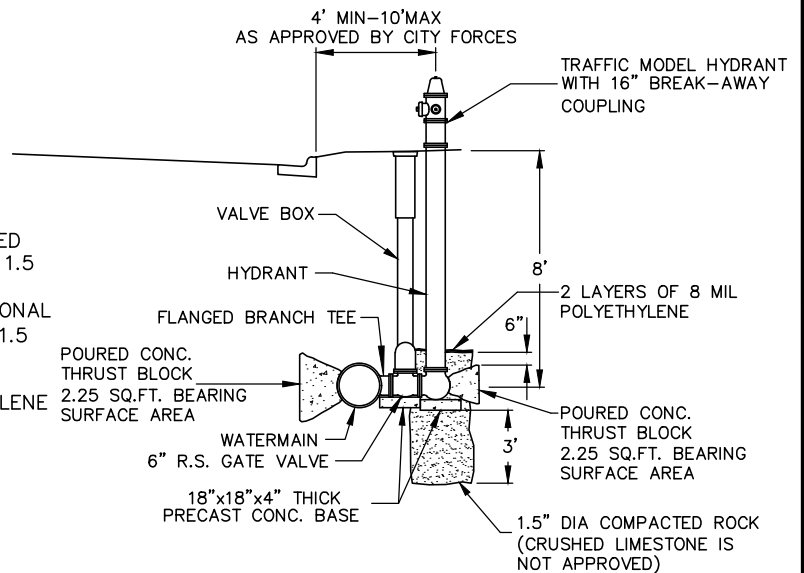

**301 – CLOSE COUPLED HYDRANT INSTALLATION**

301 - Cls-Coup Hyd Install.dwg

6/2015

H:\CAD\_COMN\Details Updated\300 - WATER\301 - Cls-Coup Hyd Install



**ENGINEERING DIVISION  
PUBLIC WORKS DEPARTMENT**

PLATE NAME:

**301 – Cls-Coup Hyd Install**

LAST REVISED: 2/24/2023

LAST REVISED BY: KBO